


MESSERKOPFAUFNAHME/FACE MILL ARBOR HSK A63/80 (KEGEL 63 mm/BUND 80 mm) HSK A63/80 (TAPER 63 mm/FLANGE 80 mm)

CERTIFICATE OF QUALITY

- ✓ Aufnahmekörper feingewuchtet
- ✓ Chuck body fine balanced
- G2.5 33.000 1/min
oder/or U<1 gmm
- ✓ Alle Funktionsflächen feinbearbeitet
- ✓ All functional surfaces fine machined
- ✓ Genauer als DIN
- ✓ More accurate than DIN

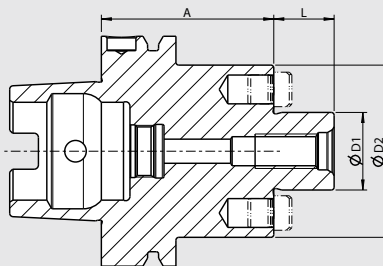

Verwendung:

Zur Aufnahme von Messerköpfen und Fräsern mit Quernut DIN 1880 sowie ab Spann Ø 40 Aufnahme nach DIN 2079 möglich (4 zusätzliche Gewindebohrungen).

Use:

For holding face mill cutters and cutters with radial driving slot DIN 1880 and exceeding clamping diameter 40 clamping according to DIN 2079 is possible, too (4 additional tapping holes).

DIN 69882-3

- Lieferumfang: mit Fräseranzugsschraube, ohne Kühlmittelrohr
- Kühlmittel-Austrittsbohrungen an der Stirnseite für Fräser und Innenkühlung

DIN 69882-3

- Included in delivery: tightening bolt, without coolant tube
- With coolant exit bores on the end face for milling cutters with central cooling

METRISCH/METRIC

Spann/Clamping	Ø D1 [mm]	22	27
	Ø D2 [mm]	48	60
	L [mm]	19	21
Maß/Length A [mm]	kurz/short	50	60
Bestell-Nr./Order No.	A63/80.050...	.22	.27



INCH

Spann/Clamping	Ø D1 [inch]	3/4	1
	Ø D2 [inch]	1.71	2.17
	L [inch]	0.67	0.67
Maß/Length A [inch]	kurz/short	1.97	2.36
Bestell-Nr./Order No.	A63/80.050...	.3/4z.i	.1z.i



Zubehör/Accessories

Fräseranzugsschraube/Tightening bolt

Größe/Size D1

Bestell-Nr./Order No. 85.300...



22

27

.22

.27

Schlüssel/Wrench

Größe/Size D1

Bestell-Nr./Order No. 84.400...



22

27

.22

.27

Wuchtringe/Balancing index rings

Größe/Size D1

Bestell-Nr./Order No. 79.350...



22

27

.50

.60